


Giunzioni ad H

H - Jointer
H - Verbindung
H - Perfil de union

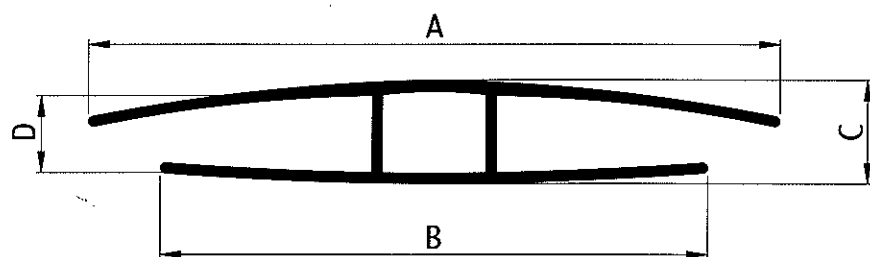

	Misure	Measures	Masse	Medidas			
	H4	H6	H8	H10	H16	H20	H25
A*	56	64	65	71	94	114	117
B	45	48	49	57	72	85	96
C	7	9	11	13	20	27	30
D	4	7	9	11	17	20	26

Tolleranze: A e B +/- 3 mm

Spessore / thickness: C e D +/- 0,3 mm

*Lato protetto agli UV / UV protected side


UV schutz / lado protegido UV

NORMAL QUALITY with UV stabilised Polycarbonate

LONG LIFE QUALITY with UV stabilised
Polycarbonate + UV protection.

Chiusure ad U

U - End caps
U - Abschluss
Perfil U

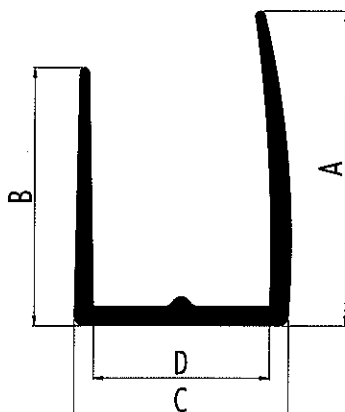

	Misure	Measures	Masse	Medidas			
	U4	U6	U8	U10	U16	U20	U25
A*	14	15	16	16	21	26	25
B*	11	13	13	14	16	23	22
C*	7	8	10	11	20	26	30
D	5	7	9	10	17	22	27

Tolleranze: A e B +/- 3 mm

Spessore / thickness: C e D +/- 0,3 mm

*Lato protetto agli UV / UV protected side

UV schutz / lado protegido UV

EXTRUDED PROFILES - PROFILE AUS POLYCARBONAT - PERFILES EXTRUIDOS

Gi Plast srl
21050 Lonate Ceppino (VA)
ITALY - Via B. Franklin, 6
Tel. ++39 0331 840.937
Fax ++39 0331 840.938
e-mail: info@giplast.com
web site: www.gioplast.com

